



GOODS HOIST

ADVANTAGES OF HAVING TECH GOODS HOIST





BRAND IMAGE

Help to build your customer trust



LABOUR

Reducing of manpower dependency



COST

Saving on company operating cost



TIME

Increasing business competitiveness with highly saving on goods transferring time



SPACE

Workspace is begin fully utilised



Reliability

A reliable investments which could last for decades



SPECIFICATION

GOODS HOIST

**SAFE WORKING
LOAD (SWL)**

: 2000 kg

CAR SIZE

Width	Depth	Height
1220 mm	1220 mm	2130 mm
1530 mm	1530 mm	2440 mm
1830 mm	1830 mm	-
2130 mm	2130 mm	-

NO. OF STOP

: 2/3/4/5

TRAVELLING

: Up to 12000mm

CAR WALL MATERIAL

: Mild Steel Plate

CAR PLATFORM

: Mild Steel Chequered Plate

RIGID GUIDE RAIL

: Mild Steel I-Beam

MOTOR ROOM

: Mild Steel I-Beam with Platform

LANDING AND CAGE DOOR

DOOR TYPE

: Fast Speed Door

CONTROL MODE

: Fully Auto

DOOR MATERIAL

: Double Layer Aluminium

DOOR OPENING SPEED


: 200 mm/sec

DOOR RAIL

: Trackless Door System

ELECTRICAL

SYSTEM	: Smart Control System
CONTROL STATION	: Push Button With Digital Display and Emergency Stop Button
CONTROL VOLTAGE	: DC24V
LED LIGHTING	: 2
CONTROL STATION	: At All Floor

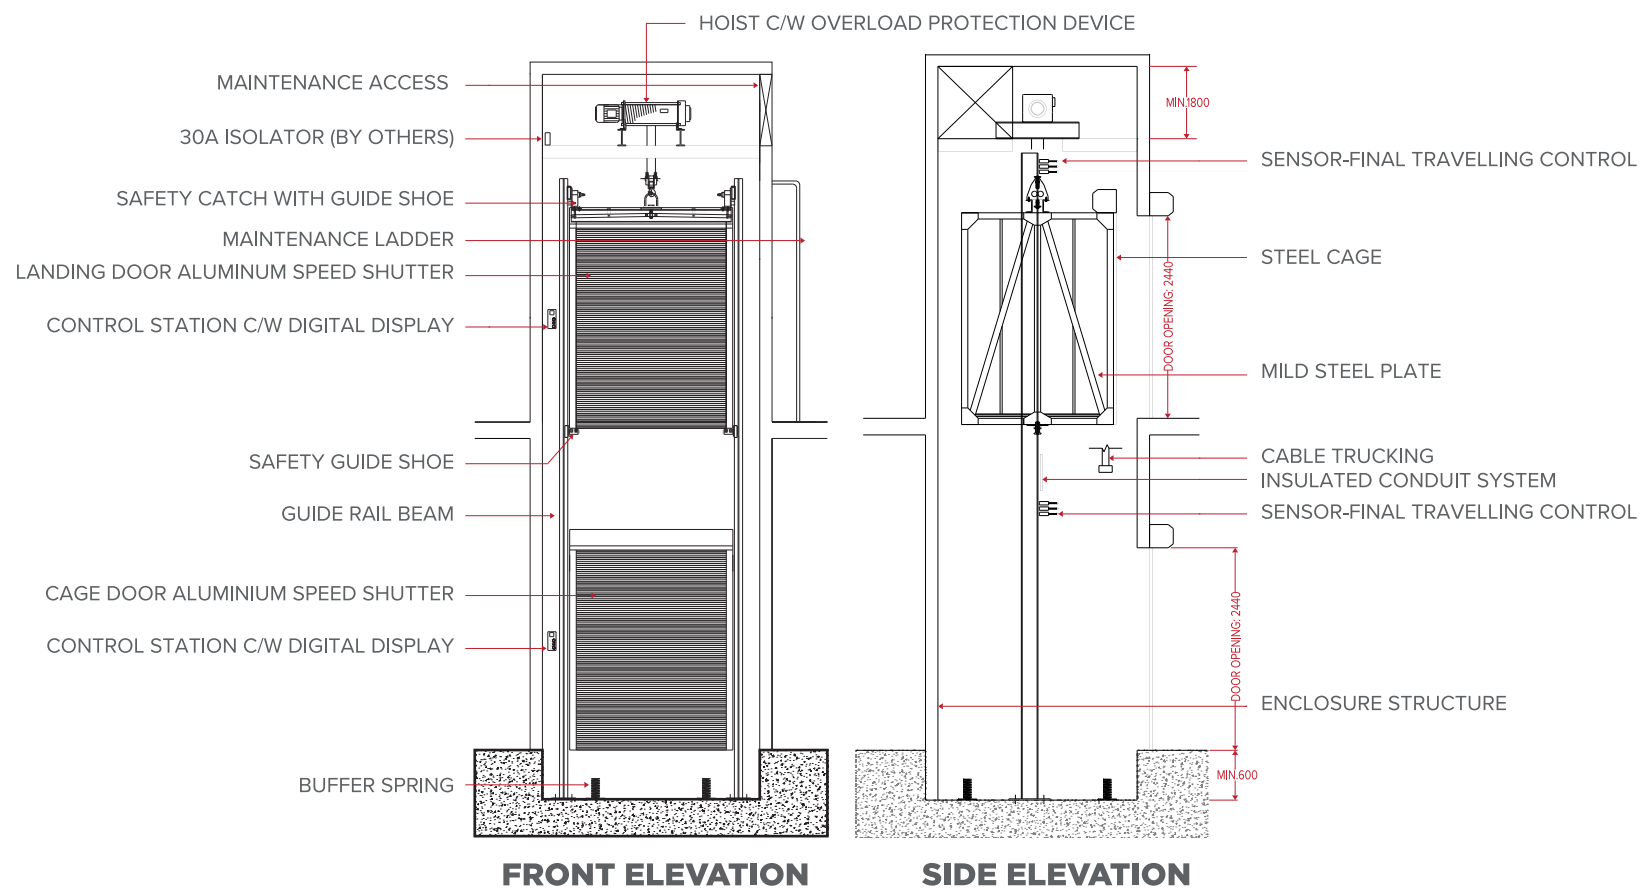

ADVANTAGES OF OUR HOIST



HIGH TENSILE WIRE ROPE



HOISTING LIMIT SWITCHES



WIRE ROPE GUIDE



OVERLOAD PROTECTION SYSTEM

HOIST SPECIFICATION

HOIST TYPE	: Foot Mounted Electric Wire Rope Hoist
HOIST MODEL	: RVB3.2
HOIST CAPACITY	: 3200kg (3.2 Ton)
LIFTING HEIGHT	: 9 / 12 meter
ROPE REEVING	: 2 / 1
LIFTING SPEED	: 10m / 1.6min
LIFTING MOTOR	: 6.1 / 1.00 Kw
ROPE DIAMETER	: ø10mm
POWER SUPPLY	: 415V 50Hz 3ph

EUROPEAN STANDARD HOIST



SAFETY FEATURES

Our Hoist bear the CE mark for compliance with the Machinery Directive 2006/42/EC providing the regulatory basis for health and safety requirements at European Union level.

- ✓ Programmable Logic Controller
- ✓ Overload Protection System
- ✓ Motion Sensor, Curtain Sensor and Magnetic Sensor
- ✓ Hoisting Rope Guide
- ✓ Safety Catch Mechanism
- ✓ Over Travelling Safety Switches
- ✓ Hydraulic Buffer Springs
- ✓ Door Limit Switch
- ✓ Electrical Door Safety Lock




WHY CHOOSE TECH GOODS HOIST ?

		TECH	OTHERS	ILLEGAL
	HOIST Country Origin Driven Motor Lifting Speed	Heavy Duty European Standard Dual Speed 10 m /1.6min	Taiwan/China Single Speed 6 m/min	Chain Hoist/Winch Single Speed 4 m/min
	DOOR Trackless Landing Door Cage Door Both Door Operating Mode Door Opening Speed	Fast Speed Auto Door Double Layer Aluminium Door Auto Operated 200 mm/sec	Collapsible Gate Collapsible Gate Manual Operated Manual	Hand Rail Without Door Manual Operated Manual
	CONTROL SYSTEM Control System Auto Closing Door	Smart Control Yes	Single Floor Control No	Single Floor Control No
	SAFETY FEATURES PLC Overload Protection Motion Sensor Hoisting Rope Guide Safety Catch Mechanism Door Limit Switches Over Travelling Safety Switches Buffer Spring Door Safety Lock	● ● ● ● ● ● ● ● Electrical	● ● ● ● ● ● ● ● Mechanical	● ● ● ● ● ● ● ● ●
	LICENSING JKPP Approval Insurance Cover	● ●	● ●	● ●

APPS PROVIDES MAXIMUM CONVENIENCE

- ✓ About us
- ✓ Schedule
- ✓ Services History
- ✓ Equipment Data
- ✓ Call For Breakdown Attendance
- ✓ Real-Time Location On Service Provider
- ✓ Paperless System, Environment Friendly

6 YEARS WARRANTY
*Service Maintenance
Breakdown Labours*

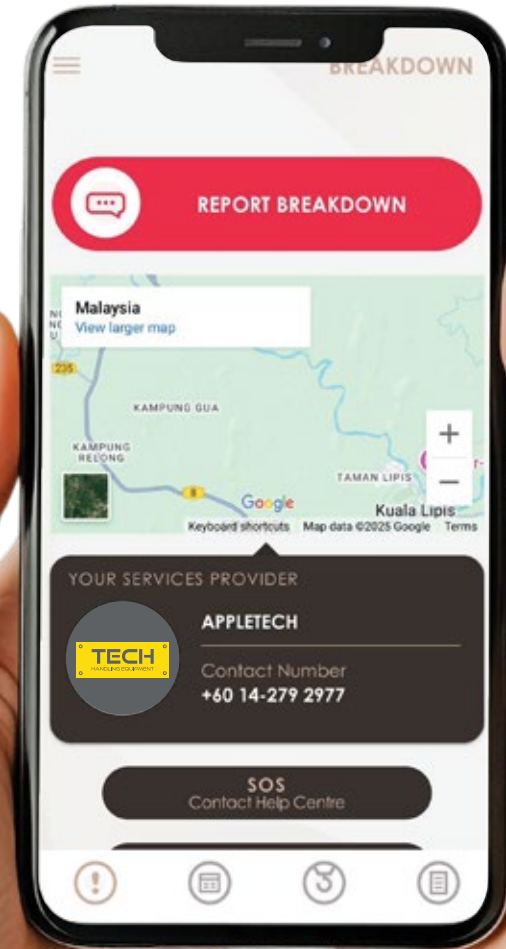

ALL IN ONE PACKAGE

INCLUDE :

✓ Service Maintenance ✓ All Parts Ready ✓ Breakdown Labour ✓ JKKP Renewal



24 HOURS ON-CALL SERVICE

 info@techequipment.com.my